



# Chariot en fonte grise GG25 avec manivelle

VECTA Système de positionnement  
www.vecta.fr

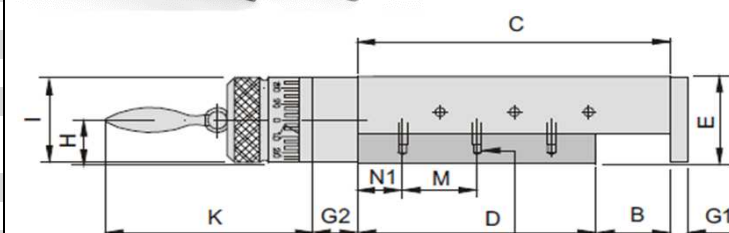

Largeur A	Longeur ext. C	Course B	Longueur int. D	Hauteur E	Longueur totale LK	M	N1	Précision de lecture	Broche
50	105	25	80	25	185	25	15	0,02 mm	M6x1
50	155	50	105		235				
50	180	75	105		260				
50	230	100	130		310				
75	105	25	80	32	196	25	15	0,02 mm	M8x1
75	155	50	105		246				
75	205	75	130		296				
75	255	100	155		346				
75	280	125	155		371				
75	305	150	155		396				
100	135	25	110	42	236	50	30	0,02 mm	M12x1
100	210	50	160		311				
100	310	100	210		411				
100	410	150	260		511				
100	510	200	310		611				
150	210	50	160	50	350	50	30	0,02 mm	M20x1
150	310	100	210		450				
150	460	150	310		600				
150	510	200	310		650				
150	710	250	460		850				
200	260	50	210	58	415	100	55	0,02 mm	M20x1
200	410	100	310		565				
200	610	200	410		765				
200	710	300	410		865				
200	810	400	410		965				
200	1010	500	510		1165				
300	410	100	310	75	608	100	55	0,02 mm	TR26x2
300	610	200	410		808				
300	710	300	410		908				
300	810	400	410		1008				
300	1010	500	510		1208				

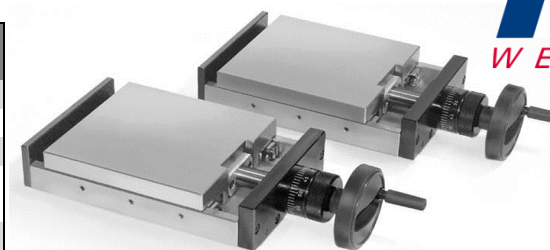

Trous de fixation pour les rails de guidage (J)  
Pas pour guidage queue d'aronde

